




Dimensions in mm

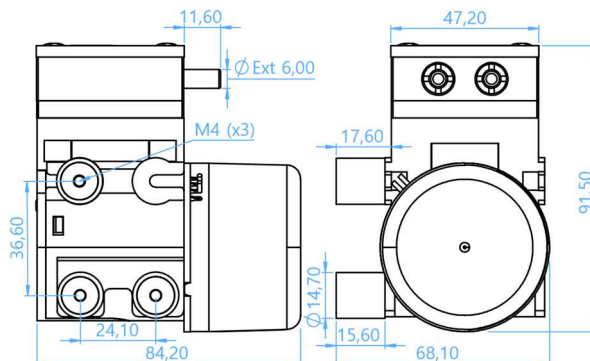

Performance Data

Maximum Flow	6,5 l/min
Maximum Vacuum	-867 mbar
Maximum Pressure	1000 mbar
Maximum Vacuum Start up	ATM
Maximum Pressure Start up	ATM

Additional data

Eccentric	1.7 mm
Silentblocks	3 x 16 mm
Mounting	3 x M4 screws w/ 4.5mm max length
Weight	470 g
Port connection	1 Inlet and 1 Outlet of \varnothing_{ext} 6mm

Motor Data

Motor Type	Brushless DC
Voltage	12V dc
Maximum current	1,0 A
IP	20
Insulation Class	E
Electrical Connection	2 wires w/ length 30cm

Relevant parts materials

Head	PPS
Diaphragm	FKM
Shutter	FKM
Head O-Rings	EPDM
Silentblocks	NBR

Service kits

900.30	RUBBER KIT ZR Z5
--------	------------------

Flow / Pressure characteristic

